

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number  
**WO 2004/021740 A1**

- (51) International Patent Classification<sup>7</sup>: **H04R 25/00 // A61F 11/08**
- (74) Common Representative: **OTICON A/S**; Strandvejen 58, DK-2900 Hellerup (DK).
- (21) International Application Number: **PCT/DK2003/000528**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: **7 August 2003 (07.08.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
PA 2002 01292 2 September 2002 (02.09.2002) DK
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (71) Applicant (*for all designated States except US*): **OTICON A/S** [DK/DK]; Strandvejen 58, DK-2900 Hellerup (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **RASMUSSEN, Karsten, Bo** [DK/DK]; CO OTICON A/S, Strandvejen 58, DK-2900 Hellerup (DK). **LAUGESEN, Søren** [DK/DK]; Oticon A/S, Strandvejen 58, DK-2900 Hellerup (DK).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **METHOD FOR COUNTERACTING THE OCCLUSION EFFECTS**

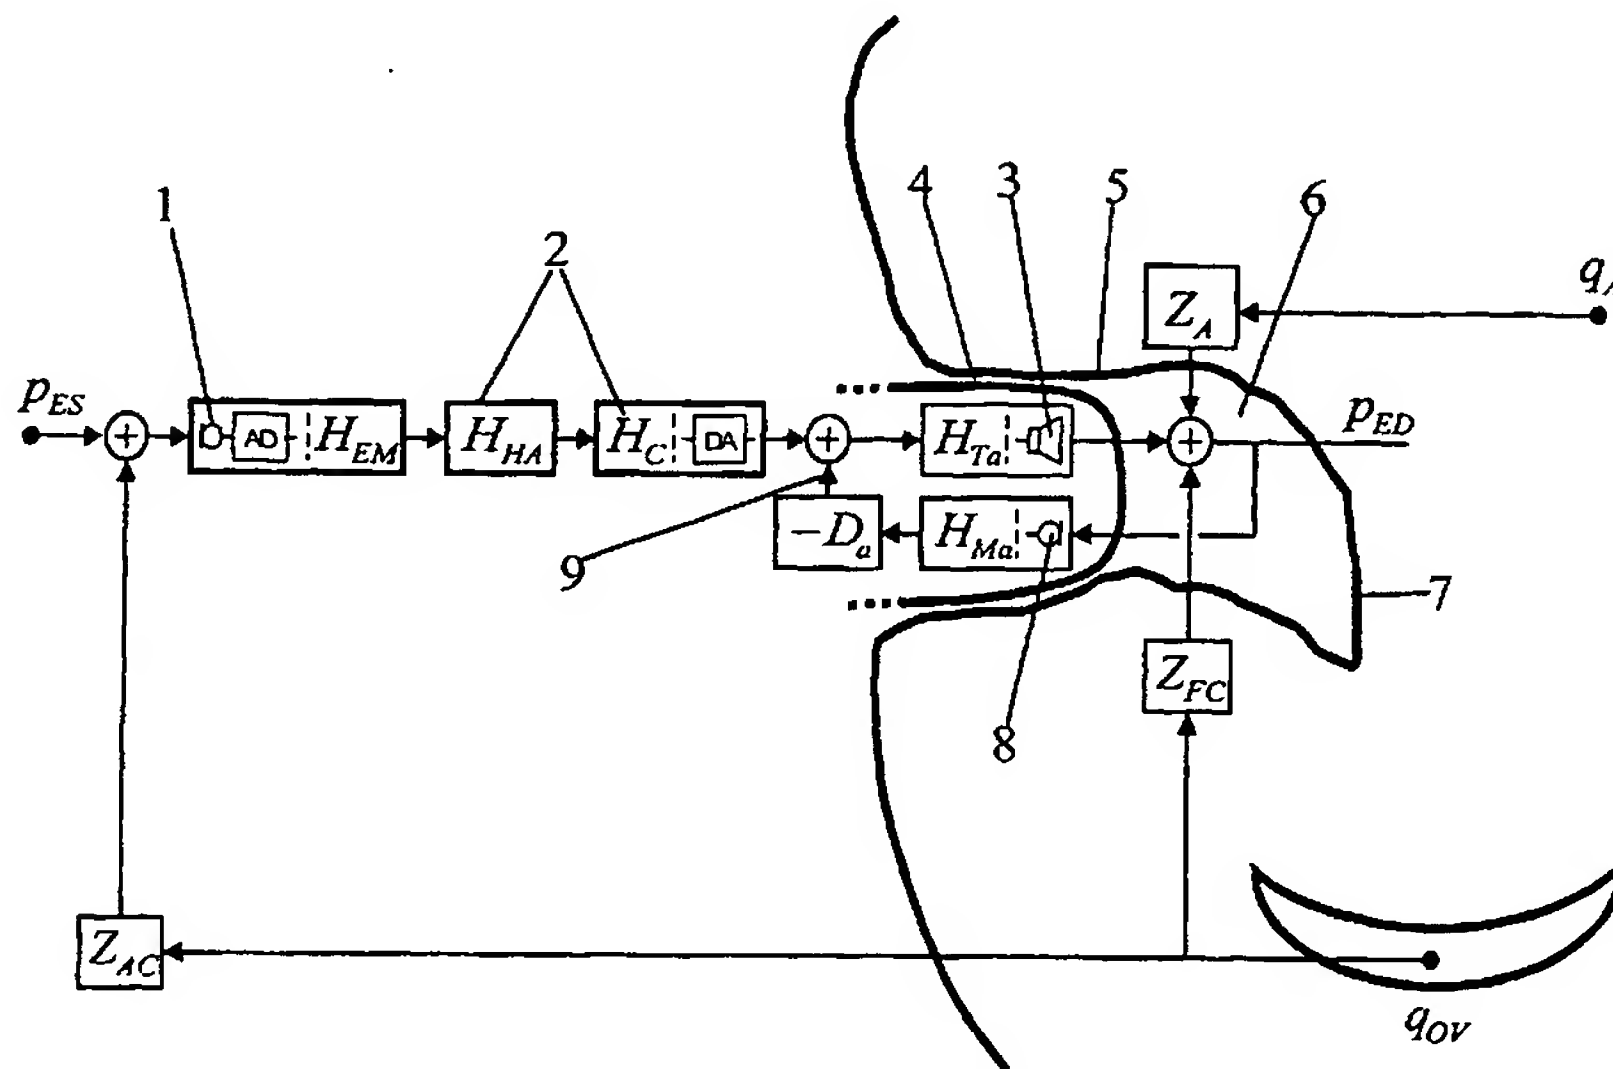

(57) Abstract: The invention concerns a method for counteracting the occlusion effect of an electronic device delivering an audio signal to the ear, like a hearing aid or and active ear protector, where the electronic device comprises a transmission path with an external microphone or input line which receives a signal from the environment and a signal processor and a receiver which receives processes signal from the signal from the signal processor and delivers sound signals to the ear, whereby an ear piece is inserted into the ear canal and totally or partially blocks the canal. According to the invention the sound conditions in the cavity between the ear piece and the tympanic membrane are directly or indirectly determined, and whenever conditions leading to occlusion problems are determined, the transmission characteristic of the transmission path to the receiver changes in order to counteract the occlusion effect.

## TITLE

Method for counteracting the occlusion effects.

## AREA OF THE INVENTION

5 This invention relates to a method for counteracting the occlusion effect of a sound protector and/or communication device like a hearing aid, whereby an ear piece is inserted into the ear canal and totally or partially blocks the canal.

## BACKGROUND OF THE INVENTION

10

One of the most common complaints of hearing aid users is that their own voice sounds unnatural: boomy, hollow or echoing. Poor sound quality of own voice is also one of the top ten reasons why some hearing aids end up in the drawer. This problem with own voice is very often due to the so-called occlusion effect, which occurs because the body-conducted contribution to a person's perception of own voice is trapped in the cavity  
15 between the occluding earmold of the hearing instrument and the tympanic membrane. The result is a build-up of sound pressure at low frequencies that may be as much as 30 dB relative to the open-ear. Typically, the occlusion effect has a flat maximum between 80-500 Hz and vanishes above 1 kHz. In the open-ear condition and at the low  
20 frequencies considered here, the body-conducted contribution is insignificant compared to the air-conducted contribution.

In today's hearing aid dispensing there are basically three ways to address the client's eventual occlusion problem with own voice. First, the earmold (or ITE hearing aid) may  
25 be equipped with a vent, through which the body-conducted part of own voice can dissipate. Secondly, it has been shown that CIC instruments that are fitted with a seal in the bony part of the ear canal can solve or at least reduce the occlusion problem in many cases. Unfortunately, bony sealed CICs have earned a bad reputation for introducing physical discomfort and are hence rarely dispensed. Thirdly, occlusion problems may be  
30 dealt with by counseling – along the lines of “You'll get used to it!”. A number of hearing aid users do not manage to get used to it, and they prefer to live with their hearing disorder un-aided.

In US patent No 4 985 925 an active noise reduction based on a negative feed back electro-acoustical system is shown. The system consists of an electronic earplug seated in the concha fossa combining active and passive noise reduction in the quiet zone at the ear, a bilateral transducer circuit which drives a speaker as an acoustical velocity source, a shunt feed back control filter network which improves stability and increases noise reduction, and a combined input noise-filter/feed back system. A typical application is in a noisy environment for hearing protection and for improved communication capability.

## SUMMARY OF THE INVENTION

The invention seeks to provide a real solution to the occlusion problem by making use of active hearing aid components.

This is achieved in a method for counteracting the occlusion effect of an electronic device delivering an audio signal to the ear, like a hearing aid or an active ear protector according to claim 1. The electronic device comprises a transmission path with an external microphone or input line which receives a signal from the environment and a signal processor and a receiver which receives a signal from the signal processor and delivers sound signals to the ear, whereby an ear piece is inserted into the ear canal and totally or partially blocks the canal. The sound conditions in the cavity between the ear piece and the tympanic membrane are directly or indirectly determined, and whenever conditions leading to occlusion problems are present, the transmission characteristic of the transmission path to the receiver counteracts the occlusion effect.

Keeping track of the sound conditions in the cavity of the occluded ear canal can be done in a number of different ways and the chosen way is not crucial to the invention. Also counteracting the occlusion can be done in a number of different ways by appropriate choice of transmission characteristic of the transmission path from the input to the receiver.

In an embodiment of the invention according to claim 2 the conditions leading to occlusion problems are determined by monitoring the activity of the users own voice,

and when own voice activity is detected the amplification through the signal processor in the frequency region below 1 kHz is reduced. It is the sound transmission through the tissue of the sound from own voice, which often leads to the sound pressure build up in the cavity. This can be compensated for by reducing the amplification through the hearing aid in the relevant frequency region below 1 kHz. Hereby the total sound pressure level in the cavity becomes comfortable. There are a number of ways in which own voice activity can be monitored. One way is to analyze the input signal from the usual microphone and to determine when characteristics which are special to the users voice are present in the signal. Also it is possible to use a vibration monitor which monitors the level of vibration in the tissue adjacent to the ear piece. Possibly the vibration monitor is built into the ear piece.

According to claim 3 the sound conditions in the cavity are monitored by an additional microphone, which is acoustically coupled to the cavity. The signal from the additional microphone is used in a feed back loop to the receiver in order to attenuate the low frequency part of the sound in the cavity. The feed back loop attenuates all low frequency sounds regardless of whether they stem from body functions such as chewing or from own voice or from another source.

When the occlusion problem is solved as described above the attenuation of the low frequency parts of the sound also is applied to the sound, which is received from the surroundings, and this is not desirable. According to claim 4 this is overcome by having the signal processor amplifying the low frequency part of the signal from the external microphone in order to compensate for the attenuation of the useful part of the signal from the external microphone or input line. In this way the useful low frequency parts of the signal, which are attenuated by the feed back loop, may be restored in the signal processor. Thus the user gets the sound from the surroundings with the usual amplification while the occlusion effect is removed or reduced.

According to an embodiment of the invention as claimed in claim 5 the feed back loop from the additional microphone is activated by own voice activity of the user. It is not a simple task to determine when to activate the feed back loop, but one safe clue is the

activity from the users own voice. As mentioned earlier this can be done in many different ways and it is not crucial to the invention which way is chosen here.

In an embodiment of the invention as claimed in claim 6 the sound entering the cavity  
5 from the tissue and causing the problematic sound levels in the cavity is captured by a vibration pick-up device. The vibration signal is filtered in a filter and combined with the signal which is captured by the external microphone or input line of the device. In this way the cause of the occlusion problem, namely the sound conducted into the ear canal from the surrounding tissue is used in a direct feed forward manner to eliminate or  
10 reduce the low frequency sound built up in the cavity.

In a further embodiment of the invention as claimed in claim 7 an inward pointing microphone monitors the sound pressure in the cavity. This signal is compared with the signal from the external microphone or input line, and where the comparison result is  
15 used to control the shape of the filter. In this way it is assured that the sound inside the ear canal is not allowed to become elevated due to sounds transmission through the tissue of the user and into the ear canal.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 is a sketch of the feed back approach to anti-occlusion with an internal microphone according to the invention.

Fig. 2 shows a sketch of the feed forward control approach to anti-occlusion using a vibration pick-up.

Fig. 3 is a schematic representation of the vibration pick-up.

25

#### DESCRIPTION OF A PREFERRED EMBODIMENT

An internal microphone 8 is used in a conventional feed back control system as sketched in fig. 1. Note that the control loop 9 is assumed to be formed in the analog domain. This  
30 is reflected in symbols for the receiver  $H_{Ta}$  and internal microphone  $H_{Ma}$  transfer functions, where the subscript  $a$  denotes a transfer function between two analog signals. Furthermore, the transfer function of the analog feed back controller is denoted by  $D_a$



and finally an additional digital block  $H_C$  has been added after the hearing aid block  $H_{HA}$ , as a means of correcting the changes to the amplification characteristic of the hearing aid introduced by the feed back control system. In this set-up  $H_C$  also includes the conversion from discrete time signal to analogue signal.

5

The relation between the source variables and the pressure at the eardrum  $P_{ED}$  is

$$(1) \quad P_{ED} = \frac{P_{ES} H_{EM} H_{HA} H_C H_{Ta} + q_{OV} (Z_{FC} + Z_{AC} H_{EM} H_{HA} H_C H_{Ta}) + q_A Z_A}{1 + D_a H_{Ta} H_{Ma}}.$$

10

From this equation it is seen that the amount of attenuation, which the body-conducted terms will be subject to is determined by the denominator  $1 + D_a H_{Ta} H_{Ma}$ . Thus, the design of the controller  $D_a$  will depend on the desired performance, but is otherwise only dependent on the combined physical transfer function  $H_{Ta} H_{Ma}$ —in the following shortened to  $H_{TMa}$ . It is also seen that desired sound  $p_{ES}$  will be subjected to the same attenuation as the body-conducted terms. However, this can be counteracted by setting  $H_C = 1 + D_a H_{TMa}$ , which in turn will mean that the second term in the parantheses following  $q_{OV}$  also will assume its original un-controlled value.

20

Since  $H_{TMa}$  will vary considerably between individual subjects and over time on each individual user, the design of  $D_a$  will have to be adaptive. Thus, the system sketched in fig. 1 will have to be extended with an adaptive model of  $H_{TMa}$ , which obviously will have to be digital. Thus the anti-occlusion system will comprise an adaptive discrete time observer from which the transfer function of the analogue controller will be designed. The resulting adjustments to the controller structure will then be implemented as a digitally controllable analogue filter.

25

In the feed back realization (Fig. 1), the filter  $D_a$  is designed according to the requested attenuation at low frequencies due to occlusion, but stability considerations must also be taken into account. Stability is ensured through analysis of the appropriate Nyquist curve for the open loop case and subsequent gain and filtering adjustment.

30

The combination of signals from the feed back path and from the hearing aid block can be done by means of a receiver equipped with two separate coils in the electromagnetic system. Hence, as shown in EP patent 1 154 673 the magnetic fields are added within the transducer.

If a vent is present in the hearing aid, the signal coming into the cavity through the vent will also be attenuated by the feed back system. If the vent has a large diameter it will in general decrease the occlusion effect and the anti-occlusion system will be adjusted accordingly or in some cases removed entirely.

In another approach as seen in fig. 2 an additional electroacoustic transducer 10 is used, which can pick up the vibrations of the soft tissue in the ear canal 5, without picking up either the external sound pressure or the sound pressure generated in the volume 6 between the earmould 4 and the eardrum 7. An idealised block diagram of the control system using such a transducer is seen in fig. 2.

As in the previous section the control is realised in the analogue domain, which means that in this case  $H_{HA}$  includes the conversion from discrete time to continuous time. Further, the relations between the own voice volume velocity,  $q_{OV}$ , and the volume velocity of other internal sources,  $q_A$ , and the signal picked up by the additional transducer 10 has been denoted by  $Z'_{FC}$  and  $Z'_A$ , respectively, the (analogue) transfer function of the alternative transducer has been denoted by  $H'_{Ma}$ , and the controller by  $D'_a$ . The relation between the source signals and the sound pressure at the eardrum is

$$(2) \quad p_{ED} = p_{ES} H_{EM} H_{HA} H_{Ta} + q_{OV} (Z_{FC} - Z'_{FC} H'_{Ma} D'_a H_{Ta} + Z_{AC} H_{EM} H_{HA} H_{Ta}) + q_A (Z_A - Z'_A H'_{Ma} D'_a H_{Ta})$$

It is seen that occlusion can be reduced by adjustment of the controller  $D'_a$  so that the  $q_{OV}$  term is made sufficiently small.

In this idealised description it is clear that a couple of potential signal paths have been left out of the picture. The most important one is the path from the sound pressure at the eardrum to the signal picked up by the vibration pick-up. If this path is significant the system will be a hybrid feed forward/feed back system, which will be more difficult to design. A probably much less important contribution is that from the external sound pressure to the signal picked up by the vibration pick-up.

The above described feed forward approach may be supplemented by a microphone measuring the sound pressure in the cavity 6 as in the feed back approach (se fig. 1). In relation to the feed forward approach, the transducer provides an error signal used for dynamic adjustment of the controller  $D'_a$  for minimum deviation between sound pressure in the cavity and the desired signal at the eardrum which will probably be,

$$p_{ED} = p_{ES} H_{EM} H_{HA} H_{Ta} + q_{OV} Z_{AC} H_{EM} H_{HA} H_{Ta}$$

Hence, the additional internal microphone makes it possible to use an adaptive filter approach taking changes in transfer functions through human tissue into account. These changes could stem from facial expressions, jaw movements, temperature changes etc.

The feed forward embodiment of the anti-occlusion system has a transducer which provides a measure of the tissue vibrations and since this vibration contribution is known, an equivalent signal can be emitted in opposite phase from the receiver in order to cancel the influence of this signal in the cavity.

The feed forward embodiment above may also be implemented using digital signal processing, such that the signal from the vibration pick-up is converted with its own AD converter and the DA converter in fig. 2 instead becomes part of  $H_{Ta}$ .

In another embodiment the above mentioned adaptive adjustment is not included and the internal microphone is not included.

In fig. 3 a transducer 10 for picking up body conducted sound is outlined. The transducer 10 is constructed on the basis of a cylindrically shaped Knowles FG microphone 11. A




Knowles FG3453-C with a cut-off frequency of 125Hz is used. The transducer 10 consists of a microphone 11 equipped with an airtight cap 12 or bell of fluoride rubber. The rubber bell is 1.5 mm high measured from the top of the microphone and 0.15 mm thick at the top. The design provides good vibration sensitivity when suitable physical  
5 contact exists between the rubber and the surrounding tissue. This choice represents a very compact and yet simple transducer, and it ensures good sensitivity and a high degree of attenuation of air-borne sound. The transducer is mounted so that good contact to the skin is provided while leaving sufficient air in the cavity 13 in front of the microphone in order to avoid rectifying the signal.

## CLAIMS

1. Method for counteracting the occlusion effect of an electronic device delivering an  
5 audio signal to the ear, like a hearing aid or and active ear protector, where the  
electronic device comprises a transmission path with an external microphone (1) or  
input line, which receives a signal  $p_{ES}$  from the environment and a signal processor  
(2) and a receiver (3) which receives a processed signal from the signal processor (2)  
and delivers sound signals to the ear, whereby an ear piece (4) is inserted into the ear  
10 canal (5) and totally or partially blocks the canal (5) whereby the sound conditions in  
the cavity (6) between the ear piece (4) and the tympanic membrane (7) are directly  
or indirectly determined, and whenever conditions leading to occlusion problems are  
determined, the transmission characteristic of the transmission path to the receiver  
(3) counteracts the occlusion effect.
- 15
2. Method as claimed in claim 1, whereby the conditions leading to occlusion are  
determined by monitoring the activity of the users own voice, and when own voice  
activity is detected the amplification through the signal processor (2) in the frequency  
region below 1 kHz is reduced.
- 20
3. Method as claimed in claim 1, whereby the sound conditions in the cavity (6) are  
monitored by an additional microphone (8) which is acoustically coupled to the  
cavity (6), whereby the signal from the additional microphone (8) is used in a feed  
back loop (9) to the receiver (3) in order to attenuate the low frequency part of the  
25 sound in the cavity (6).
- 30
4. Method as claimed in claim 3, whereby the signal processor (2) amplifies the low  
frequency part of the signal from the external microphone in order to compensate for  
the attenuation of the useful part of the signal from the external microphone (1) or  
input line.

5. Method as claimed in claim 3 or claim 4, whereby the feed back loop (9) from the additional microphone (8) is activated by own voice activity of the user.
6. Method as claimed in claim 1, whereby the sound entering the cavity (6) from the tissue and causing the occlusion sound levels within the cavity (6) is captured by a vibration pick-up (10), and where the vibration signal is filtered in a filter  $D'_a$  and combined with the signal which is captured by the external microphone (1) or input line of the device.
7. Method as claimed in claim 6, whereby an inward pointing microphone (8) monitors the sound pressure in the cavity (6), and where this signal is compared with the signal from the external microphone (1) or input line, and where the comparison result is used to control the shape of the filter  $D'_a$ .
8. Method as claimed in claim 1 and 2, whereby the detection of own voice activity is carried out by the use of a vibration pick-up (10) in contact with a body portion of the user.



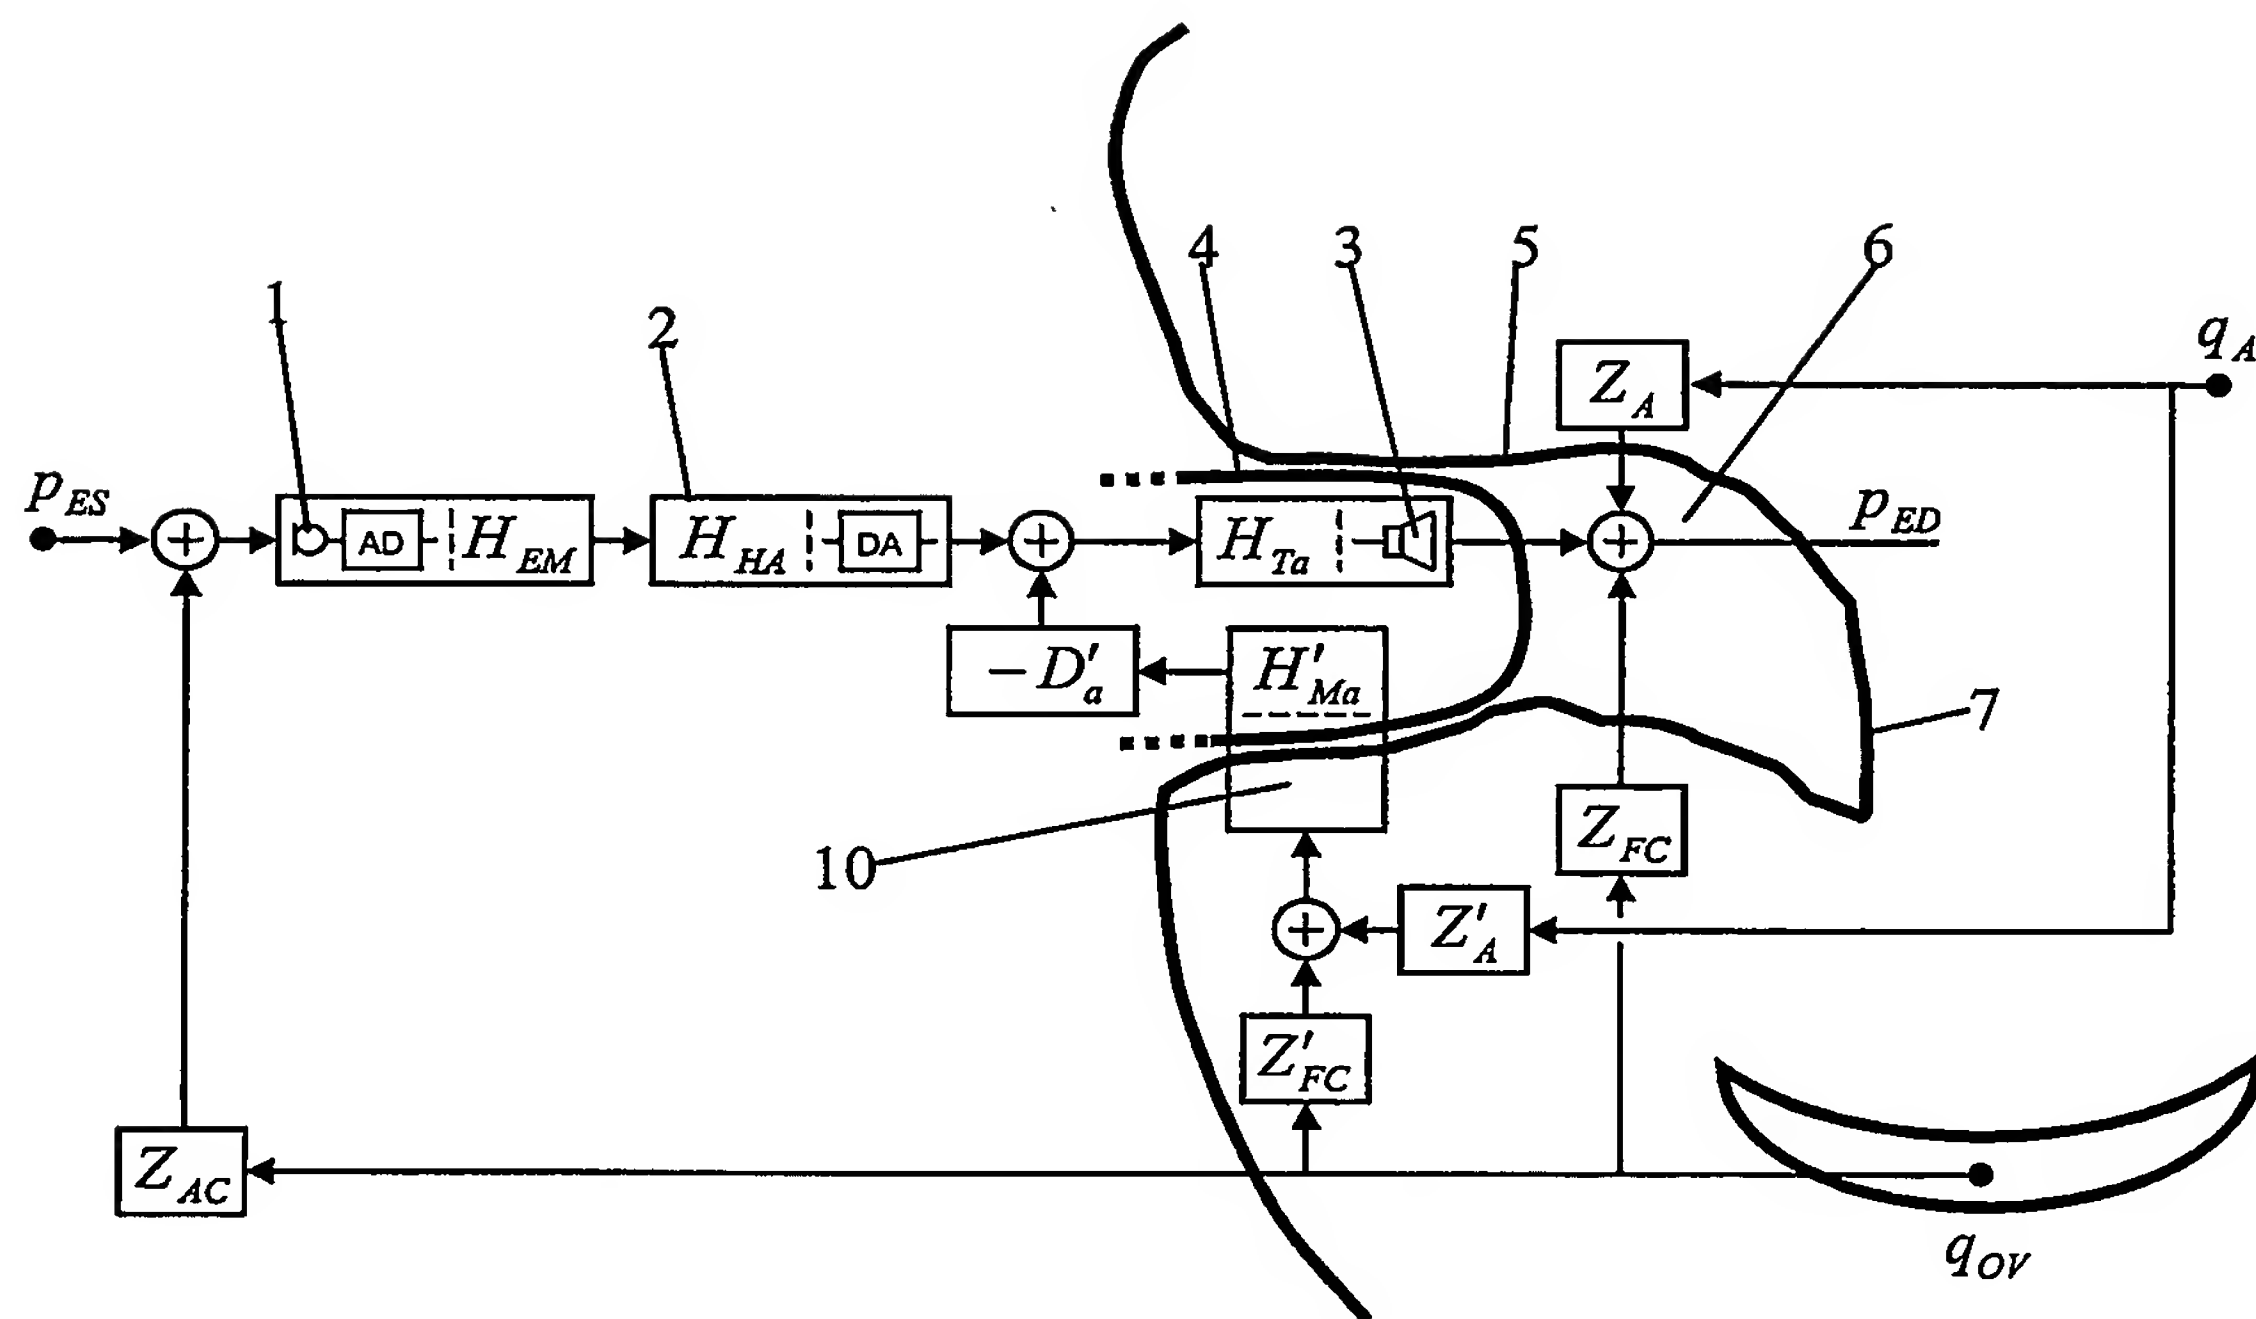

**Fig. 2**



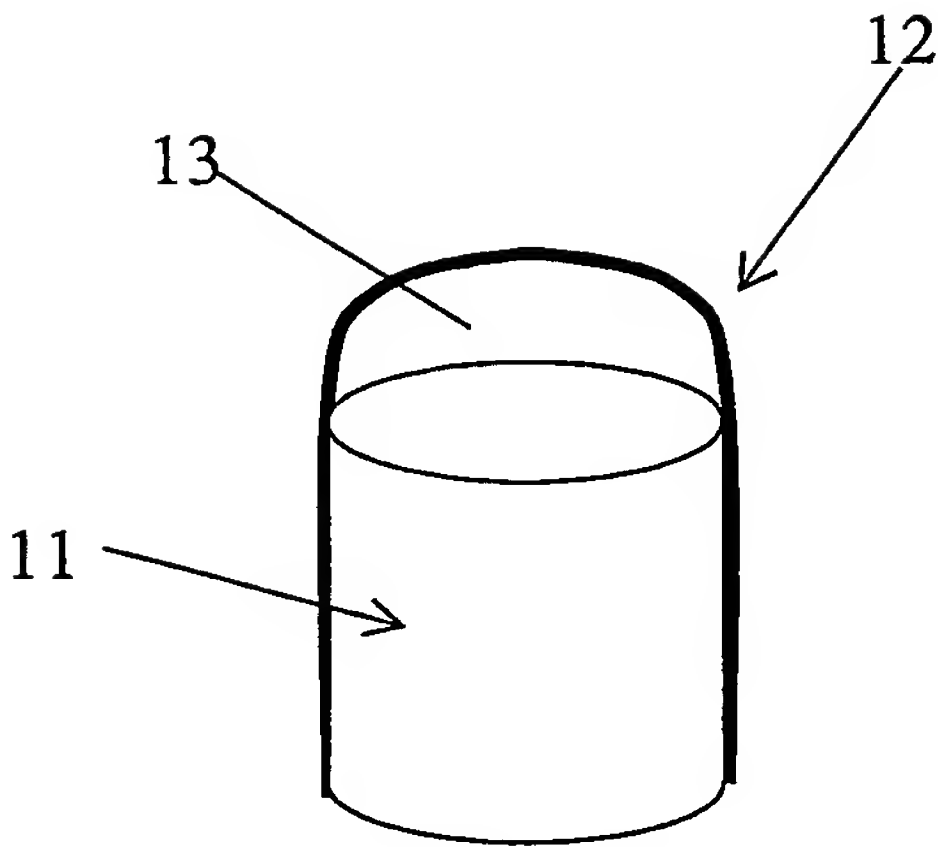


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PC 03/00528

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04R25/00 //A61F11/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04R A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)  
EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 17838 A (PETTERSEN ODD KR OE ; SINTEF TELE OG DATA (NO); SVEAN JARLE (NO); O) 7 March 2002 (2002-03-07) page 1, line 1 - page 5, line 16 abstract	1-8
P,X	US 2003/012391 A1 (ARMSTRONG STEPHEN W ET AL) 16 January 2003 (2003-01-16) the whole document	1-8
Y	US 5 201 006 A (WEINRICH SOREN) 6 April 1993 (1993-04-06) the whole document	1-8
Y	US 5 577 511 A (KILLION MEAD C) 26 November 1996 (1996-11-26) abstract	1-8
	- / - -	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier document but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
 "&" document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

04.12.2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

HENRIK ANDERSSON/MN

INTERNATIONAL SEARCH REPORT

Internat	Application No
PC	03/00528

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 154 673 A (OTICON AS) 14 November 2001 (2001-11-14) the whole document	1-8
A	--- US 5 875 254 A (HANRIGHT WILLIAM L) 23 February 1999 (1999-02-23) the whole document -----	1-8

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PATENT K 03/00528

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0217838	A	07-03-2002	NO 20004374 A	04-03-2002
			US 6567524 B1	20-05-2003
			AU 8814701 A	13-03-2002
			CA 2418027 A1	07-03-2002
			EP 1313419 A1	28-05-2003
			WO 0217838 A1	07-03-2002
-----				
US 2003012391	A1	16-01-2003	EP 1251714 A2	23-10-2002
-----				
US 5201006	A	06-04-1993	DK 412889 A	23-02-1991
			CH 683477 A5	15-03-1994
			DE 4026420 A1	28-02-1991
-----				
US 5577511	A	26-11-1996	NONE	
-----				
EP 1154673	A	14-11-2001	EP 1154673 A1	14-11-2001
-----				
US 5875254	A	23-02-1999	NONE	
-----				